

LG-05PD4D94K-5118U DATA SHEET

SPEC. NO. : SZ21110101
DATE : 2021/11/01
REV. : A/0

Approved By:

Checked By:

Prepared By:



Part No. LG-05PD4D94K-5118U






LIGHT



Su.73 4s152 783.5 Do 500.t4 10C6ET E2 Tf1T E2 Tfi IR Ref 0 llow Con1TSu.710.47C1E3/1a518 FUS2-5WB

LIGH



LED MOUNTING METHOD

1. The lead pitch of the LED must match the pitch of the mounting holes on the PCB during component placement. Lead-forming may be required to insure the lead pitch matches the hole pitch.

LEAD FORMING PROCEDURES

1. Maintain a minimum of 2mm clearance between the base of the LED lens and the first lead bend (Fig.5 and Fig.6).

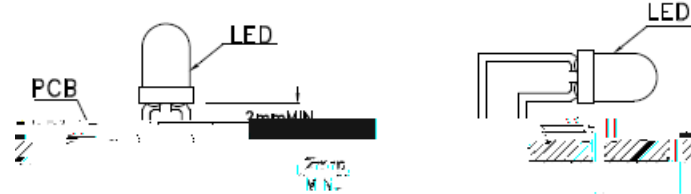


Fig. 6

Fig. 5

2. Lead forming or bending must be performed before soldering, never during or after soldering.

3. Do not stress the LED lens during lead-forming in order to fractures in the lens epoxy and damage the internal structures.

4. During lead forming, use tools or jigs to hold the leads securely so that the bending force will not be transmitted to the LED lens and its internal structures. Do not perform lead forming once the component has been mounted onto the PCB (Fig.7).

5. Do not bend the leads more than twice(Fig.8)

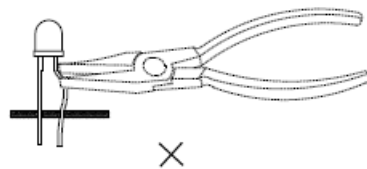


Fig. 7




Fig. 8

6. After soldering or other high-temperature assembly, allow the LED to cool down to 50 before applying force (Fig.9).In general, avoid placing excess force on the LED to avoid damage. For any questions please consult with LIGHT representative for proper handling procedures.

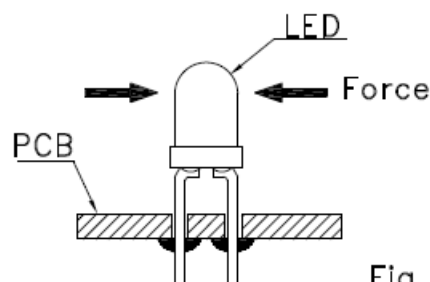


Fig. 9

HEIGHT