

SL-T3020PDB020-L268-E-S

PHOTO Diode

LIG

LIGHT EL

Featu

—RoHS con
sitivity
gged
lid state reli
ngle: 100°

Pack ension

Pa

Absolute Maximum Ratings at Ta=25

Parameter	Maximum Rating	Unit
Power Dissipation	150	mW
Reverse Voltage	30	V
Electrostatic Discharge (HBM) *2	8000	V
Moisture Sensitivity Level*1	5	
Operating Temperature	-40 ~+85	
Storage Temperature Range	-40 ~+100	
IR Reflow Temperature	260 for 10 Seconds MAX.	

1. Storage and operating:

- (1). Storage requirements before vacuum bag opened: Temperature<30 , Humidity<65%RH;
- (2). Check air leakage and vacuum bag damage before opened. If there is any issue found, check the humidity indicator card immediately after bag opened:
 - a. If color changes on “10% circle” of the humidity indicator card only and not the circles of 20% and above, components can be used without additional handling;
 - b. If color changes on both 10% and 20% circles but not the circles of 30% and above, components must be dehumidified according to the conditions of bullet (5);
 - c. If color changes on 10%, 20%, and 30% circle or above, the product should be returned to the supplier for high temperature dehumidification;
- (3). After bag opened, manual soldering or reflow process must follow the following requirements:
 - a. Complete soldering / reflow within 48 hours;
 - b. Requirements of working environment: Temperature<30 , Humidity<60%RH;
- (4). If the working condition is outside (3)a requirement, the components must be dehumidified according to the conditions of bullet (5);
- (5). Low temperature dehumidification: temperature 60±5 , at least 24 hours;
- (6). Shelf life: 60 days. If it's over 60 days from the production date on the package label, the components must be dehumidified according to the condition of bullet (5). If customer is unable to dehumidify, return components to LIGHT for dehumidification.

2. Caution in ESD:


Static Electricity and surge damages the LED. It is recommend to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Electrical Optical Characteristics at Ta=25


PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Range of Spectral Bandwidth		850	---	1100	nm	---
Wavelength of Max Sensitivity	S _{MAX}	---	940	---	nm	---
Reverse Light Current	I _L	15.5	20	---	μA	V _R =5V E _e =1mW/cm ² p=940nm
Reverse Dark Current	I _D	---	---	30	nA	V _R =10V E _e =0mW/cm ²
Reverse Voltage	V _(R)	30	---	---	V	I _R =100μA
Forward Voltage	V _F	---	---	1.5	V	I _F =20mA
Viewing Angle(X)	2 _{1/2}	90	100	110	Deg.	(Note 1)
Viewing Angle(Y)	2 _{1/2}	28	33	38	Deg.	
Rise Time/ Fall Time	tr/tf	---	50	---	ns	V _R =10V RL=1k
Total Capacitance	C _T	---	12	---	pF	V _R =5V E _e =0mW/cm ² f=1.0MHz

Note:

1. _{1/2} is the off-axis angle at which the Reverse Light Current is half the axial Reverse Light Current.
2. The I_L guarantee should be added ±15% tolerance.

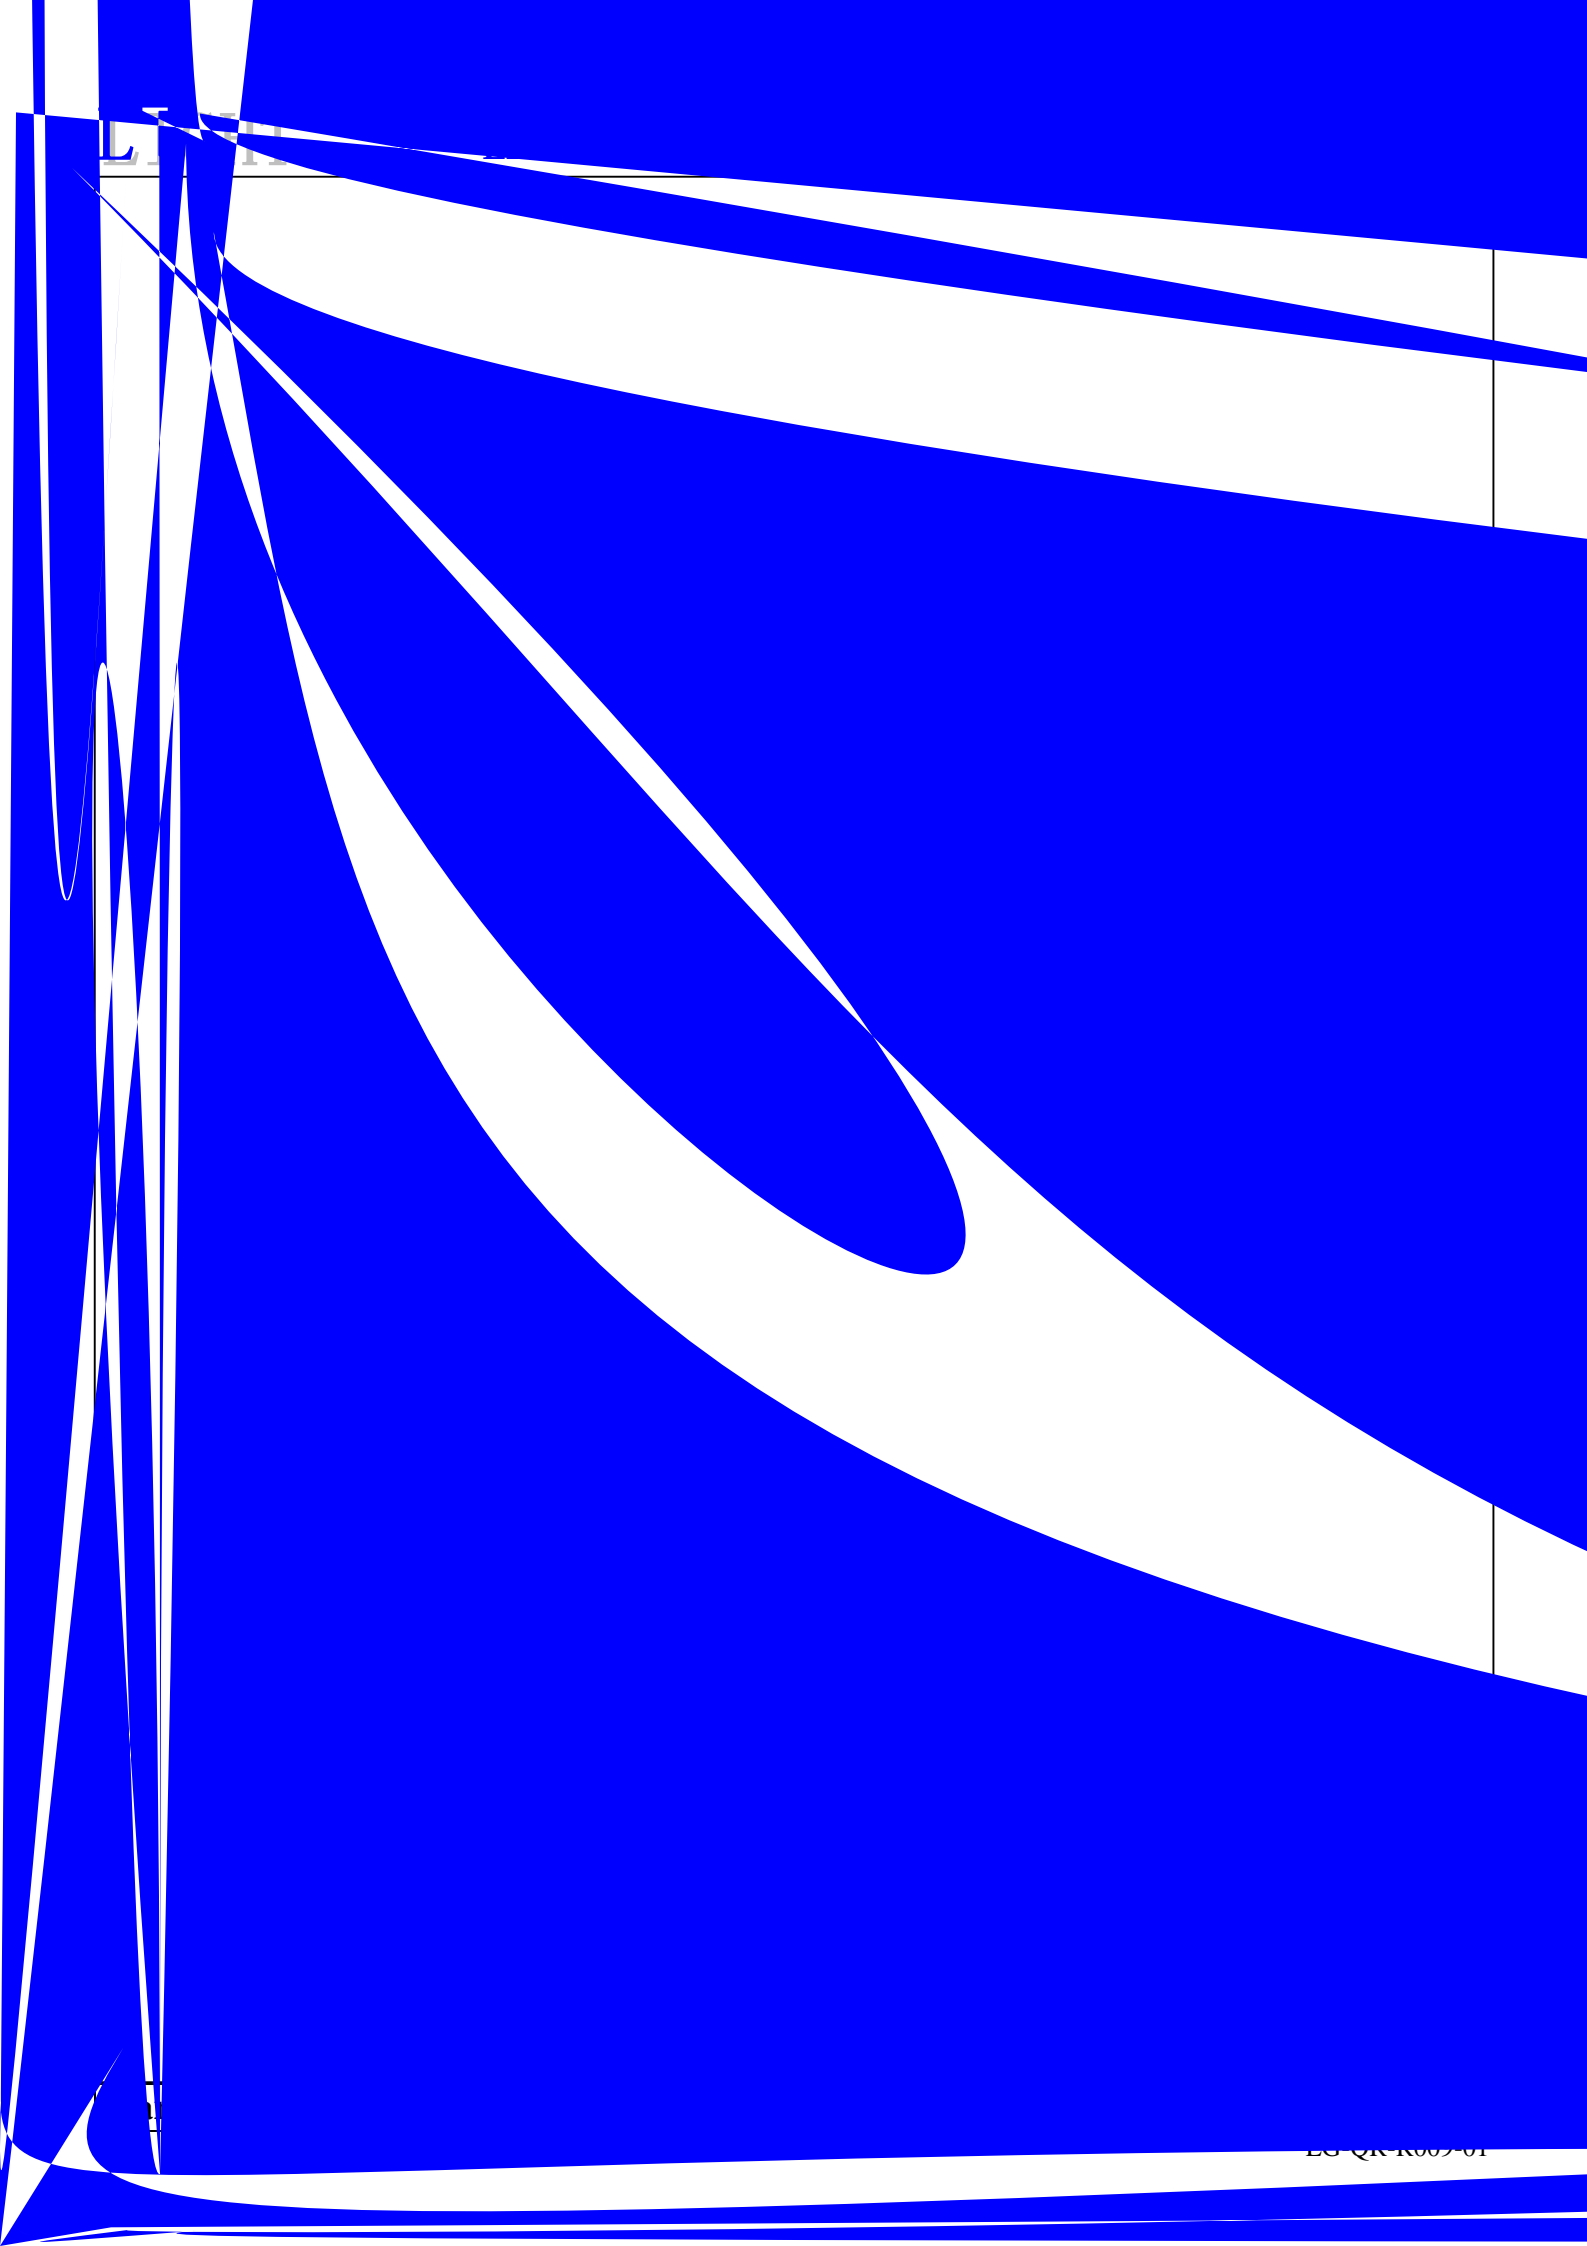

Note: Tolerance unless mentioned is ± 0.1 mm; Unit = mm

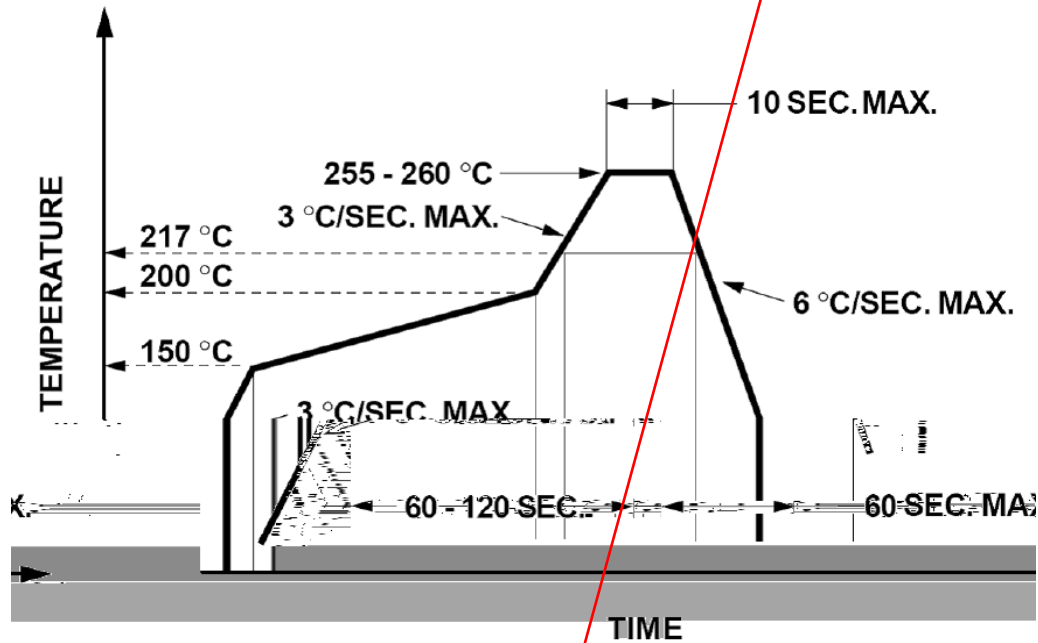

1. Reflow soldering should not be done more than two times.
2. When soldering, do not put stress on the LEDs during heating.

1. When hand soldering, the temperature of the iron must less than 300°C for 3 seconds.
2. The hand solder should be done only once.

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of LEDs will or will not be damaged by repairing.

