

# SL-T1516RGBA-L150-N

SPEC.NO. : SZ19101203  
DATE : 2020/04/24  
REV. : A/1

Approved By:


Checked By:

Prepared By:

## SL-T1516RGBA-L150-N

TOP Full-color LED

### Technical Data Sheet



These products are full-color SMD components with black frame and white refractor, high contrast, matt packaging and non-mirror reflection, which are featured by multiple waterproof performance, good reliability, long lifespan and wide viewing angle. They are designed for outdoor display and decoration applications.

**Features:**

Material:	Red	Green	Blue
	AlGaInP	InGaN	InGaN

Encapsulation: Epoxy Resin

Soldering methods: Pb-Free reflow soldering

High Luminous Intensity ,Low Power Dissipation, good Reliability and Long Life

ROHS  
Complied With ROHS Directive

### Catalogue

Electrical Characteristics.....	2
Typical Characteristic Curves.....	3
Reliability Test Items and Conditions.....	4
Product design and operating recommendation.....	5
Packaging.....	6
Guideline for Soldering.....	8
Precautions.....	10

\*

\* The specifications of the product may be modified for improvement without notice.

## Electro-Optical Characteristics

✧ Absolute Maximum Ratings (Temperature=25 °C)

Parameter	Symbol	Rating	Unit
Forward Current	$I_F$	25	mA
Pulse Forward Current*	$I_{FP}$	50	mA
Reverse Voltage	$V_R$	5	V
Operating Temperature	$T_{amd}$	-30 ~ +85	
Storage Temperature	$T_{stg}$	-40 ~ +100	
Power Dissipation	Red	62.5	mW
	Green	85	
	Blue	85	

\* 0.1ms 1/10 \* Note: Pulse Width 0.1ms, Duty 1/10

✧ Electro-Optical Characteristics (Temperature=25 °C)


Parameter	Symbol	Condition	Color	Min.	Typ.	Max.	Unit
Reverse Current	$I_R$	$V_R=5V$	Red			10	
			Green			10	
			Blue			10	
Forward Voltage	$V_F$	$I_F=15mA$	Red	1.8	2.1	2.5	V
		$I_F=8mA$	Green	2.4	2.9	3.4	
		$I_F=5mA$	Blue	2.4	2.9	3.4	
Dominant Wavelength	$\lambda_D$	$I_F=15mA$	Red	615	622	630	nm
		$I_F=8mA$	Green	515	528	540	
		$I_F=5mA$	Blue	460	469	480	
Spectrum Radiation Bandwidth		$I_F=15mA$	Red			24	nm
		$I_F=8mA$	Green			38	
		$I_F=5mA$	Blue			28	
Luminous Intensity	$I_V$	$I_F=15mA$	Red	200	370	560	mcd
		$I_F=8mA$	Green	320	560	850	
		$I_F=5mA$	Blue	40	80	130	
View Angle	2 1/2				110		deg.

以上 厂商


manufacturer

## Typical Characteristics Curves


Volt-Ampere Characteristics

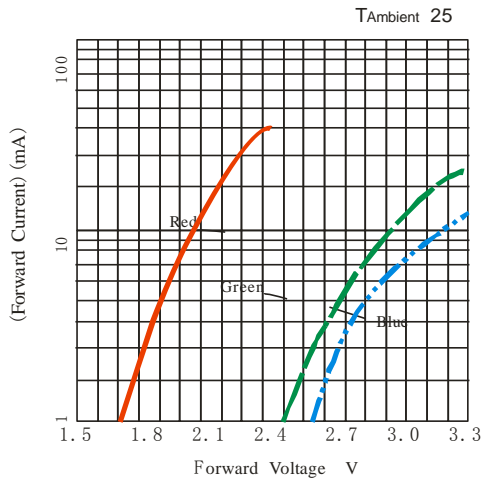


Relative Luminous Intensity VS Forward Current

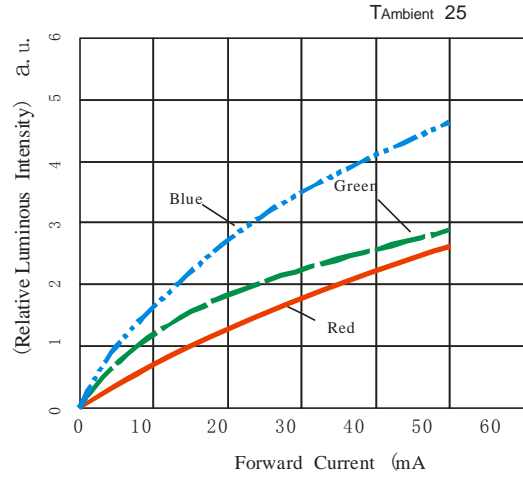

Forward Current Derating Curve

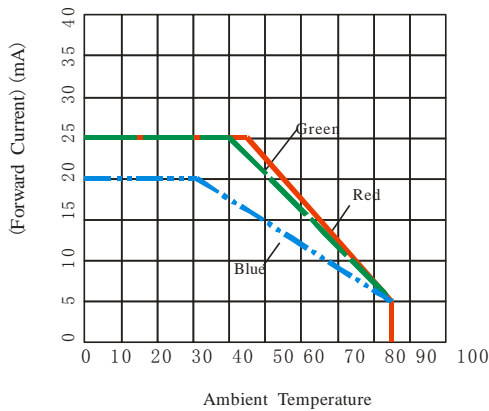


Luminous Intensity VS Ambient Temperature

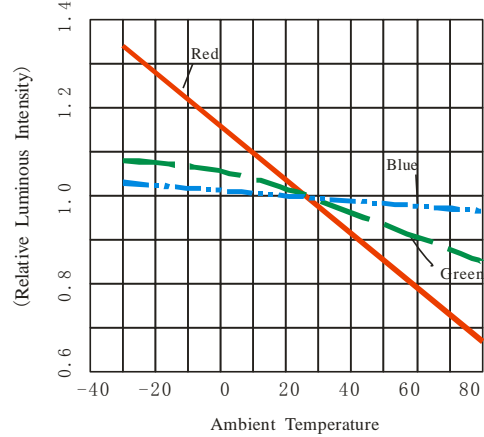


(Relative Luminous Intensity) (a. u.)

Relative Spectral Distribution

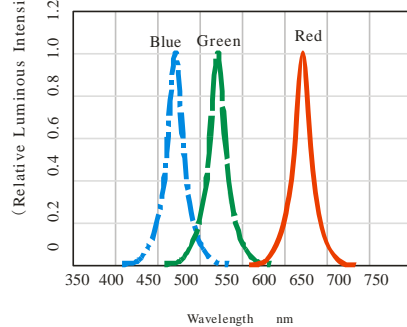

(Relative Luminous Intensity) (a. u.)

Typical Spatial Distribution

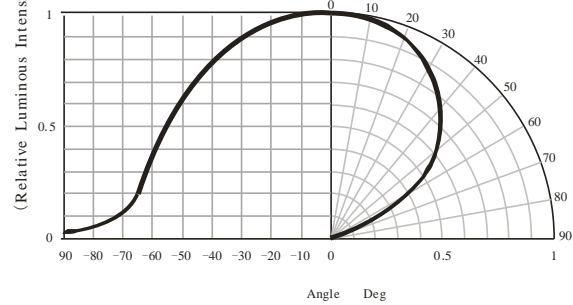

LIG



**LIGHT ELECTRONICS CO., LTD.**

---

## Product Design and Operating Recommendation

1 mm

Product design Unit: mm

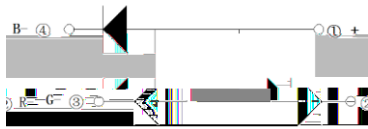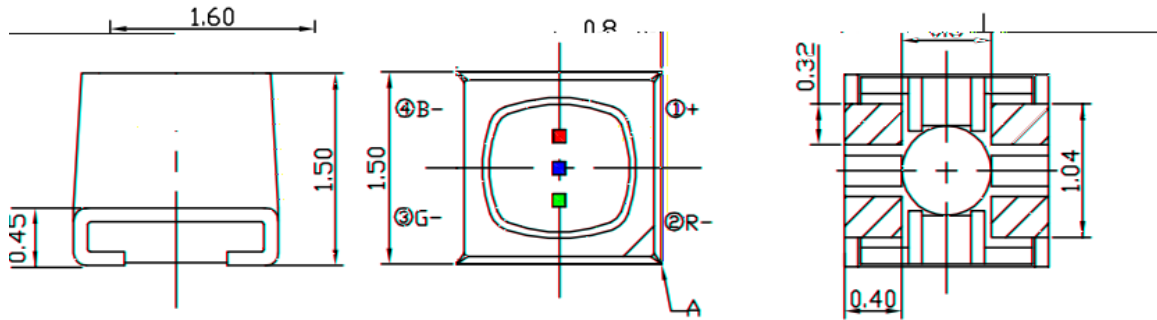


Polarity

Note

A Nick Mark  
 X.X 0.1 mm X.XX 0.05mm  
 Tolerances X.X 0.1 mm X.XX 0.05mm


2 mm

Reference soldering pad (Unit: mm)

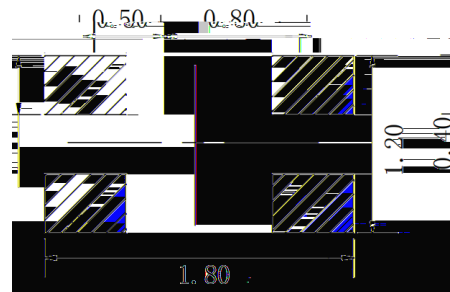

3 0.60mm

Recommendation for glue filling: filling height must be higher than or equal to 0.60mm

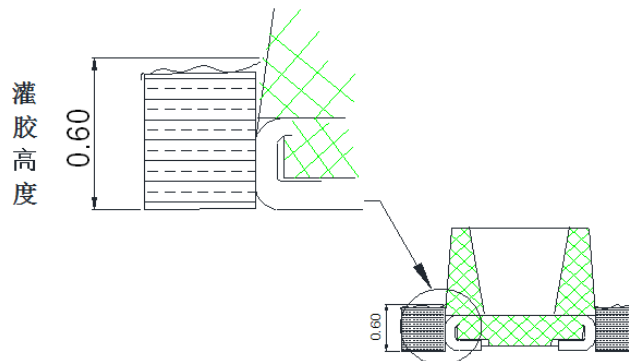


**LIGHT**

**LIGHT ELECTRONICS CO., LTD.**

---




✧ **Cardboard Box**

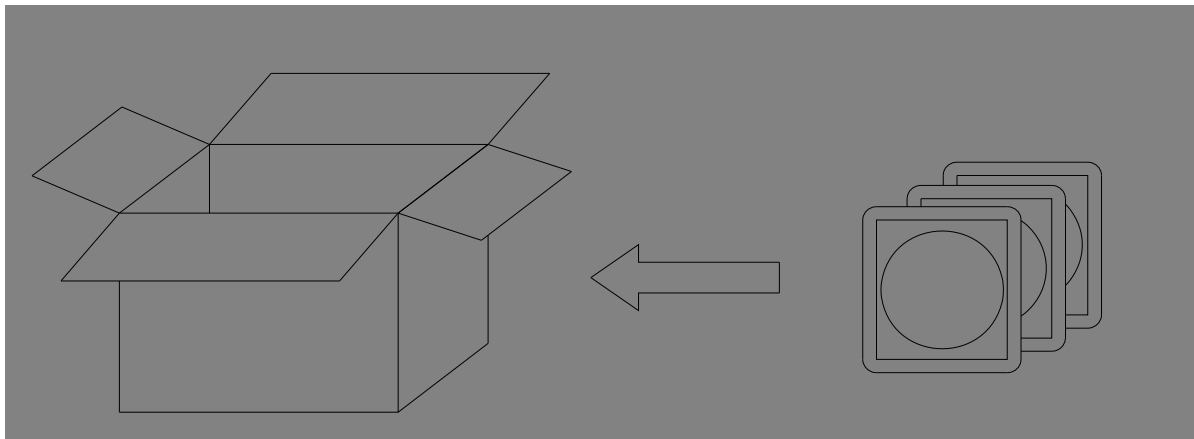

✧ **Label Explanation**

LIGHT



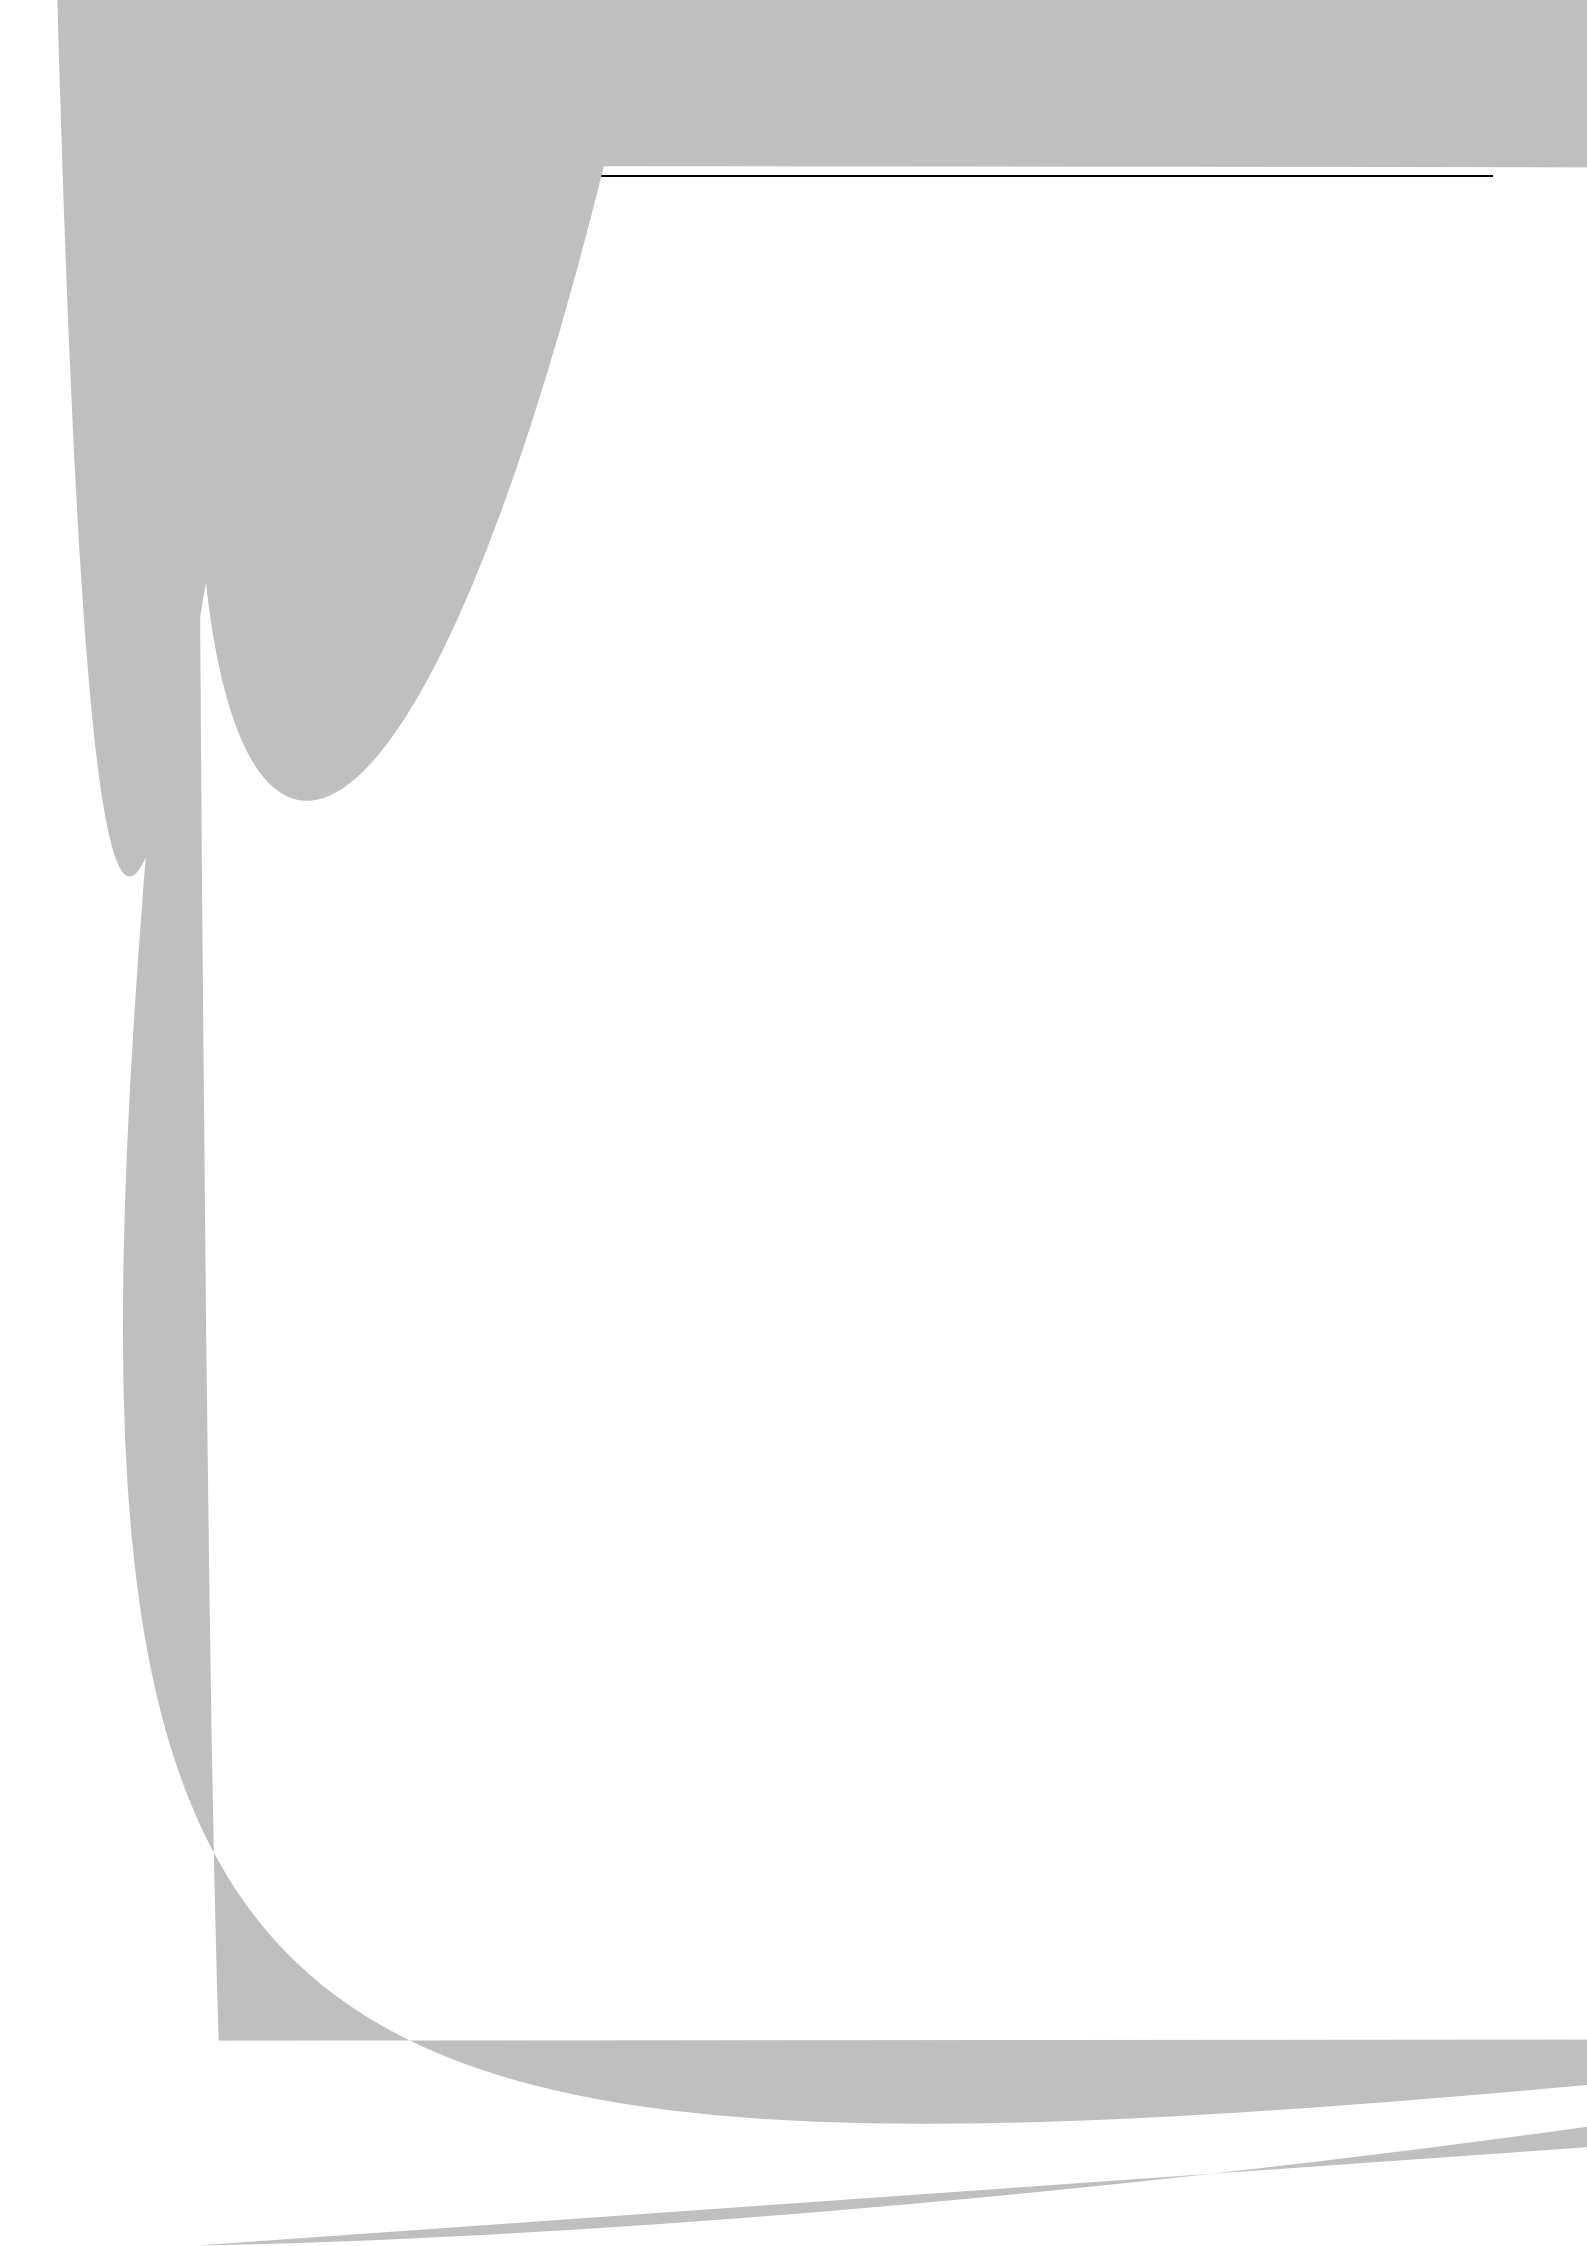

**LIGHT ELECTRONICS CO., LTD.**

---



LIGHT

LIGHT ELECTRONICS CO., LTD.

---

## 何 (3)

### Precautions (3)

Such as the reverse current increase rapidly. And it will cause the string light when the screen is black. So please pay attention to controlling the reverse voltage which less than 5V is recommended.

5.

#### The safe temperature for LEDs working

- LED

55

75


The high temperature will make are used in hot environment for a long time, they will be disabled easily. When LEDs are used in a high density array, we suggest that the LEDs and the lower than 75 .

6.

Others

- 

When handling the product, touching the encapsulation with bare hands will not only contaminate its surface, but also have an effect on its optical characteristics. Excessive force to the encapsulation might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.

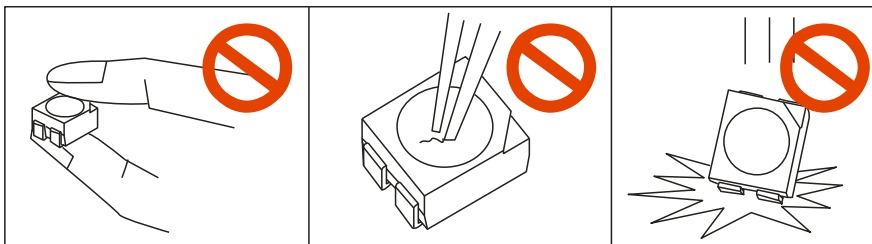

- LED

The epoxy resin of encapsulation is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.