

SL-T1516RGBA-L150-N

SPEC.NO. : SZ19101203
DATE : 2020/04/24
REV. : A/1

Approved By:

Checked By:

Prepared By:

SL-T1516RGBA-L150-N

TOP Full-color LED

Technical Data Sheet



These products are full-color SMD components with black frame and white refractor, high contrast, matt packaging and non-mirror reflection, which are featured by multiple waterproof performance, good reliability, long lifespan and wide viewing angle. They are designed for outdoor display and decoration applications.

Features:

➤	Material:	Red	Green	Blue
		AlGaInP	InGaN	InGaN
➤	Encapsulation: Epoxy Resin			
➤	Soldering methods: Pb-Free reflow soldering			
➤	High Luminous Intensity ,Low Power Dissipation, good Reliability and Long Life			
➤	ROHS			
➤	Complied With ROHS Directive			

Catalogue

Electrical Characteristics.....	2
Typical Characteristic Curves.....	3
Reliability Test Items and Conditions.....	4
Product design and operating recommendation.....	5
Packaging.....	6
Guideline for Soldering.....	8
Precautions.....	10

*

* The specifications of the product may be modified for improvement without notice.

Electro-Optical Characteristics



Absolute Maximum Ratings (Temperature=25 °C)

Parameter		Symbol	Rating	Unit
Forward Current		I_F	25	mA
Pulse Forward Current*		I_{FP}	50	mA
Reverse Voltage		V_R	5	V
Operating Temperature		Tamd	-30 ~ +85	
Storage Temperature		Tstg	-40 ~ +100	
Power Dissipation	Red	Ptot	62.5	mW
	Green		85	
	Blue		85	

* 0.1ms 1/10 * Note: Pulse Width 0.1ms, Duty 1/10









Electro-Optical Characteristics (Temperature=25 °C)

Parameter	Symbol	Condition	Color	Min.	Typ.	Max.	Unit
Reverse Current	I_R	VR=5 V	Red			10	
			Green			10	
			Blue			10	
Forward Voltage	V_F	IF=15mA	Red	1.8	2.1	2.5	V
		IF=8mA	Green	2.4	2.9	3.4	
		IF=5mA	Blue	2.4	2.9	3.4	
Dominant Wavelength	λ_D	IF=15mA	Red	615	622	630	nm
		IF=8mA	Green	515	528	540	
		IF=5mA	Blue	460	469	480	
Spectrum Radiation Bandwidth		IF=15mA	Red			24	nm
		IF=8mA	Green			38	
		IF=5mA	Blue			28	
Luminous Intensity	I_V	IF=15mA	Red	200	370	560	mcd
		IF=8mA	Green	320	560	850	
		IF=5mA	Blue	40	80	130	
View Angle	2 1/2				110		deg.

* 本表の値は、試験条件に準拠した値であり、実際の製品と異なる場合があります。必ず、本製品のラベル上の値を参照してください。

* Note: The parameters above only for your reference. In case of any discrepancy, please adhere to the label of our actual products. All parameters tested by the standard testing system of manufacturer.

Typical Characteristics Curves

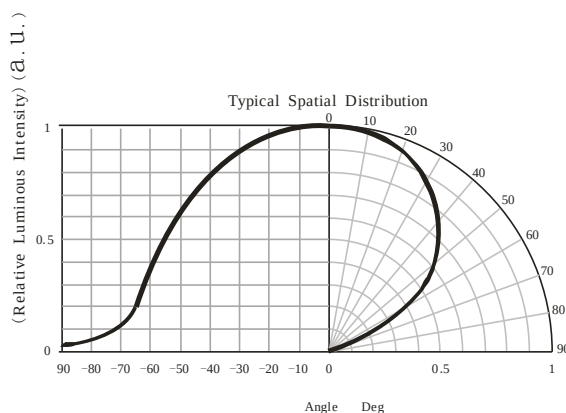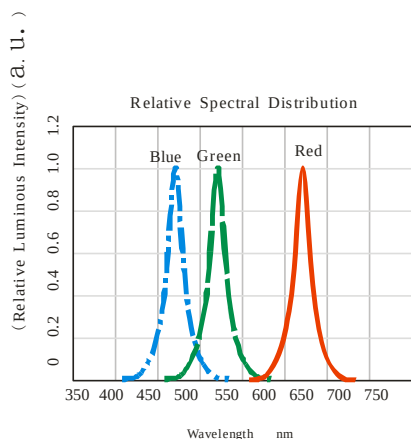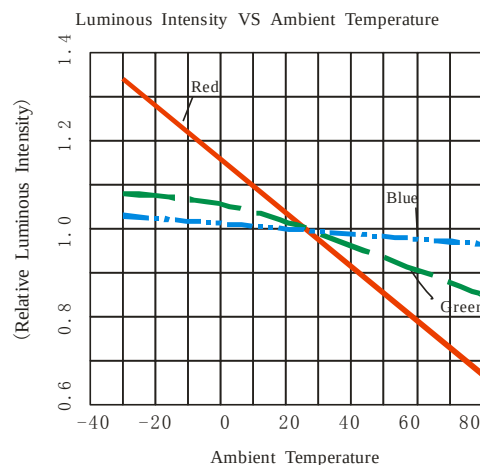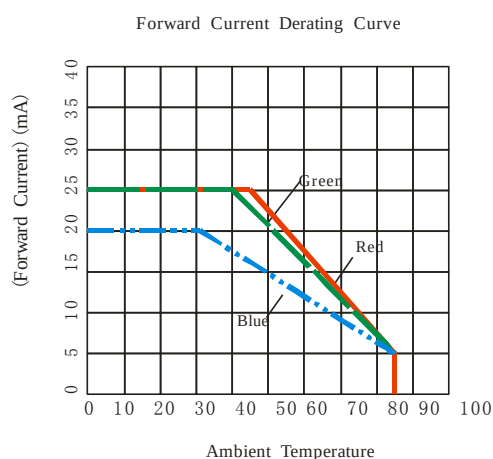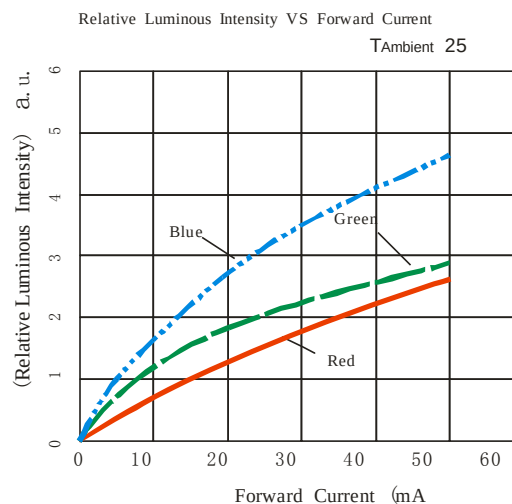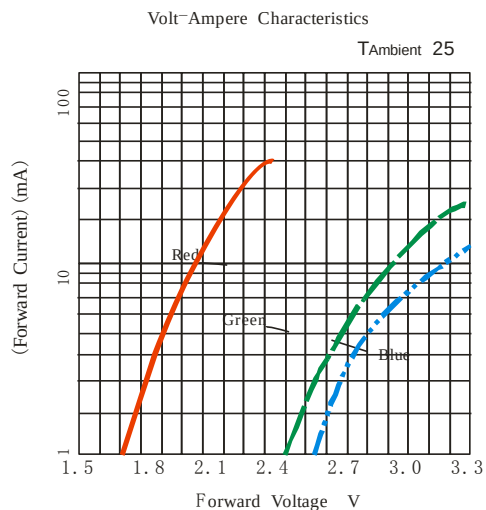



LIG

LIGHT ELECTRONICS CO., LTD.

Product Design and Operating Recommendation

1 mm

Product design Unit: mm

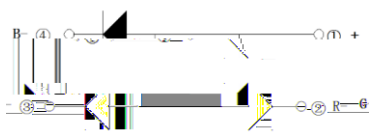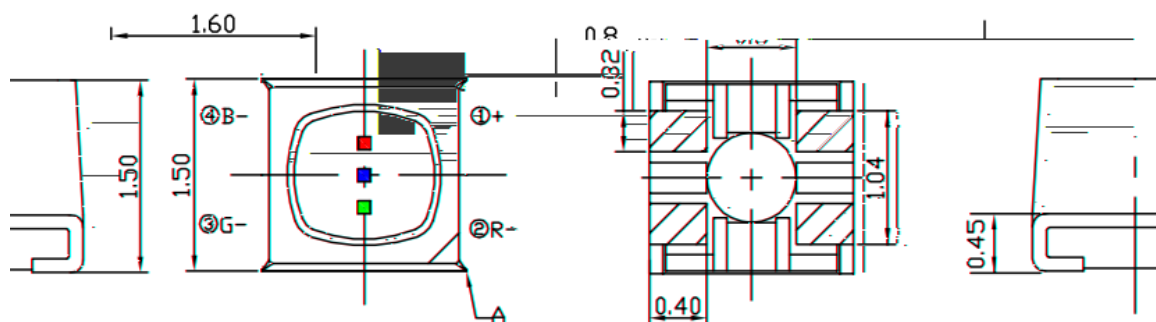

Polarity

Note

A


A Nick Mark

X.X 0.1 mm X.XX 0.05mm

Tolerances X.X 0.1 mm X.XX 0.05mm


2 mm

Reference soldering pad (Unit: mm)

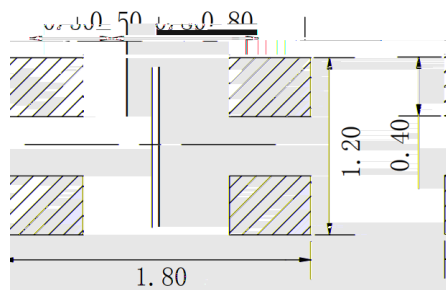


3 0.60mm

Recommendation for glue filling: filling height must be higher than or equal to 0.60mm

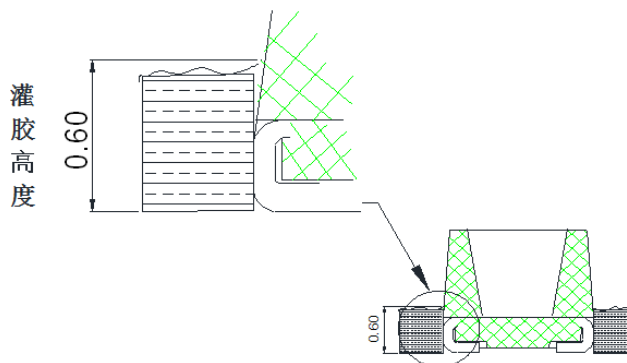



✧ ^ **Cardboard Box**

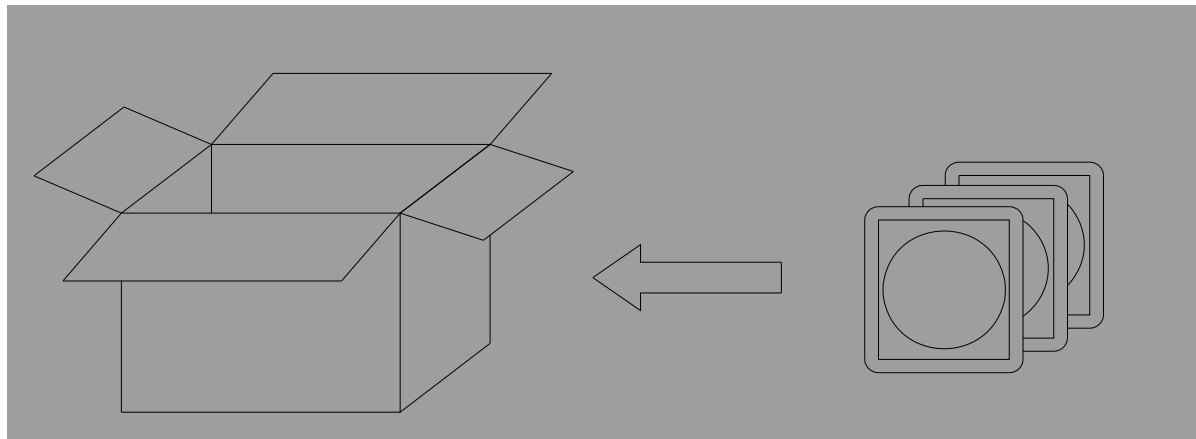

✧ **Label Explanation**

LIGHT



(1)

Precautions (1)

1.

Storage

•

Moisture proof, anti-electrostatic package and moisture absorbent material are used, to keep moisture to a minimum. Humidity indicator card inside to test if the products are moisted.

•

<30 <60 RH

Storage environment: All the products should be stored in the environment of temperature<30 and humidity<60 RH before foiled bags open and need to be baked before SMT.

•

Before using, please check whether there is any air leakage or not, If the bag has leaked air, Please bake the product with below condition.

•

<30 <60 RH 8h

Before soldering ,the product must be stored under the condition of <30 and <60 RH. Under these conditions the SMD LEDs must be used (subject to reflow oven) within 8 hours.

●

70 $\pm$ 5 12h70 $\pm$ 5 24h6 70 $\pm$ 5 48h

Baking condition storage undamped : 70 ± 5 $\times 12$ h

e (undamped): 70 ± 5 $\times 24h$

Damped/Foiled bag leakage/ beyond 6 months storage at customers side: 70±5 ×48h

2.

Static Electricity

•

(3)

Precautions (3)

Such as the reverse current increase rapidly. And it will cause the string light when the screen is black. So please pay attention to controlling the reverse voltage which less than 5V is recommended.

5.

The safe temperature for LEDs working

- LED

55

75


The high temperature will make are used in hot environment for a long time, they will be disabled easily. When LEDs are used in a high density array, we suggest that the LEDs and the lower than 75 .

6.

Others

-

When handling the product, touching the encapsulation with bare hands will not only contaminate its surface, but also have an effect on its optical characteristics. Excessive force to the encapsulation might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.

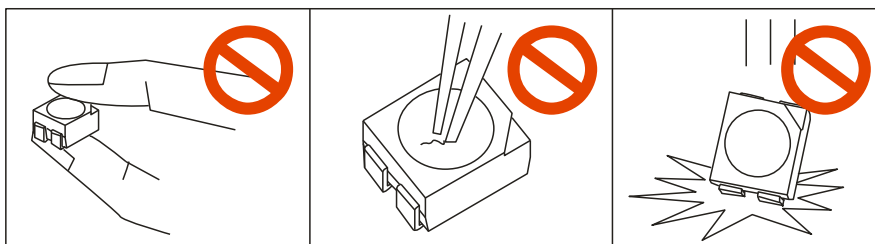

- LED

The epoxy resin of encapsulation is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.