




## Features

## Package Dimension




Notes:

## Absolute Maximum Ratings at Ta=25

Parameter	MAX.	Unit


1. Storage and operating:

2. Peak Forward Current:

Condition for is IFP pulse: Pulse Width 100 $\mu$ s and duty 1%.

3. Caution in ESD:

# LIGHT









## Radiant Intensity Bin Code (IF=50mA)

BIN CODE	Min. (mW/sr)	Max. (mW/sr)
31	22	26
32	26	31.9
33	31.9	37
34	37	44
35	44	53


**NOTE**


## Label Explanation

<b>LIGHT</b> Light Electronics CO., LTD	
MODEL NAME: _____	 LOT NO. : _____
QUANTITY: _____	
BIN: _____	
PACKING DATE: _____	
REMARKS: _____	

<b>LIGHT</b> Light Electronics CO., LTD	
MODEL NAME: _____	 LOT NO. : _____
QUANTITY: _____	
BIN: _____	
PACKING DATE: _____	
CUSTOMER P/N: _____	

## Reel Dimensions



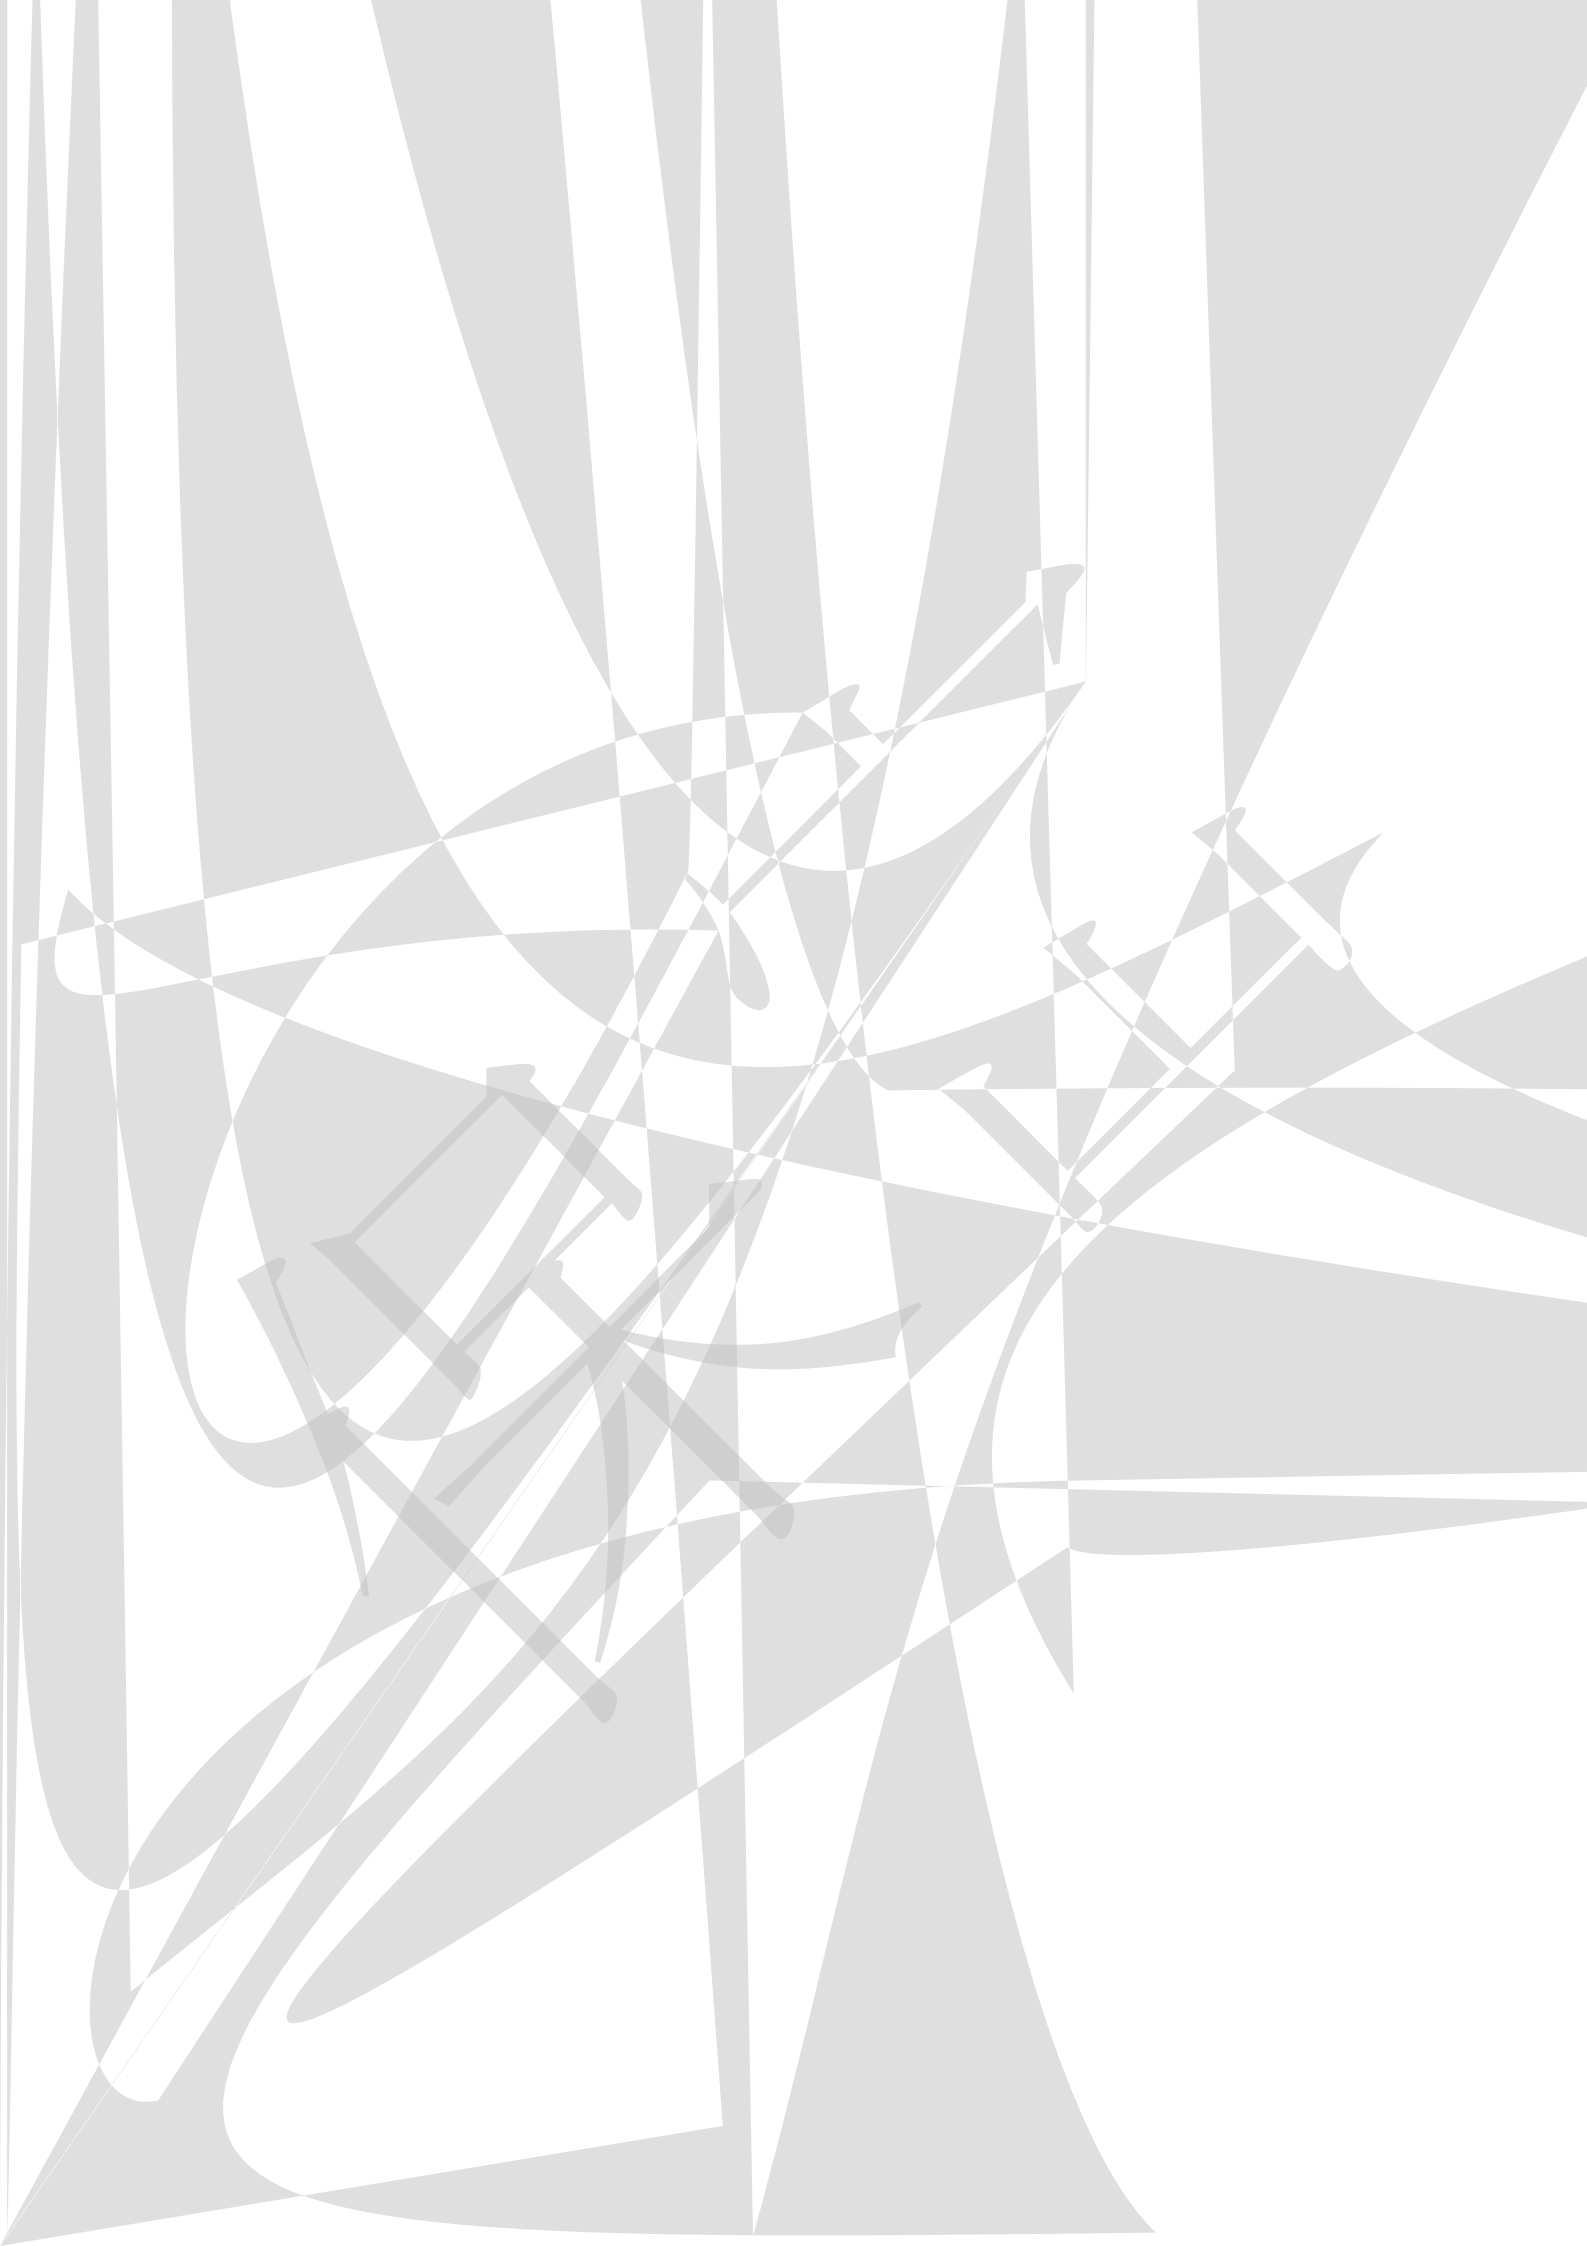

# LIGHT

