
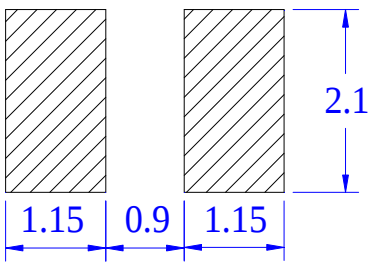



SL-T3020IRC050-L268-U

Features

Package Dimension

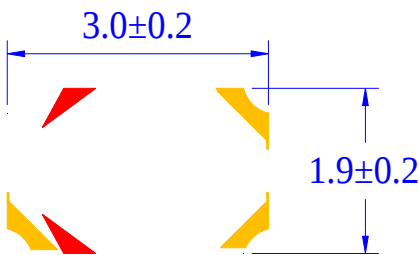

Recommended stencil size

Notes:

Absolute Maximum Ratings at Ta=25

1. Storage and operating:

2. Peak Forward Current:

Condition for is IFP pulse: Pulse Width $\leq$ 100 μ s and duty $\leq$ 1%.

3. Caution in ESD:



A.

EO

EO

	44	53
	53	64
	64	77
	...	...

NOTE


LIGHT

L D I



Note:

E



GHT