

SL-T3020IRC050-L236-C-S

Absolute Maximum Ratings at Ta=25

1. Storage and operating:

Typical Electrical / Optical Characteristics Curves (25 Ambient Temperature Unless Otherwise Noted)

Fig.1 Spectral Distribution

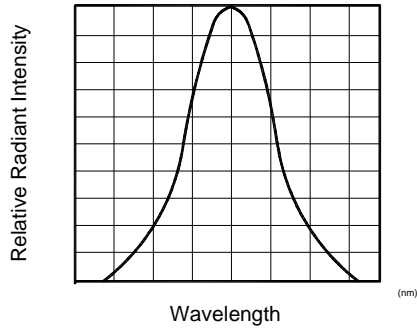


Fig.2 Forward Current Vs Ambient Temperature

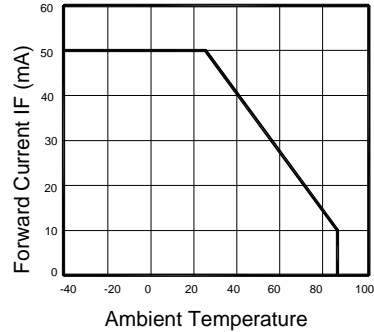


Fig.4 Relative Radiant Intensity Vs Ambient Temperature




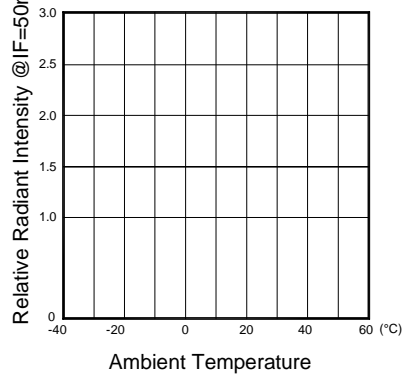



Fig.6 Radiation Diagram

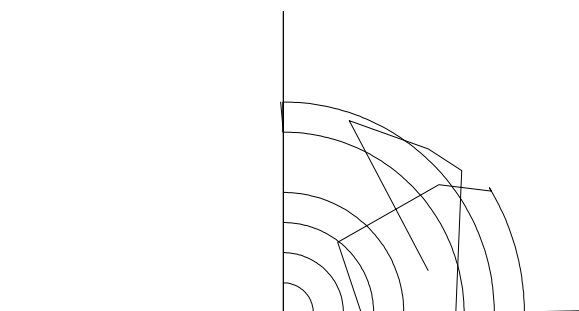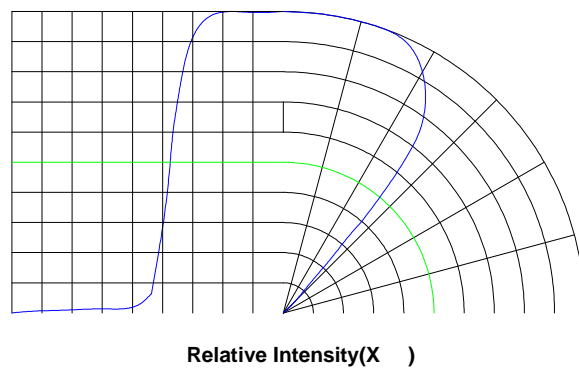


LIGHT



LIG



Suggest IR Reflow Condition For Lead Free

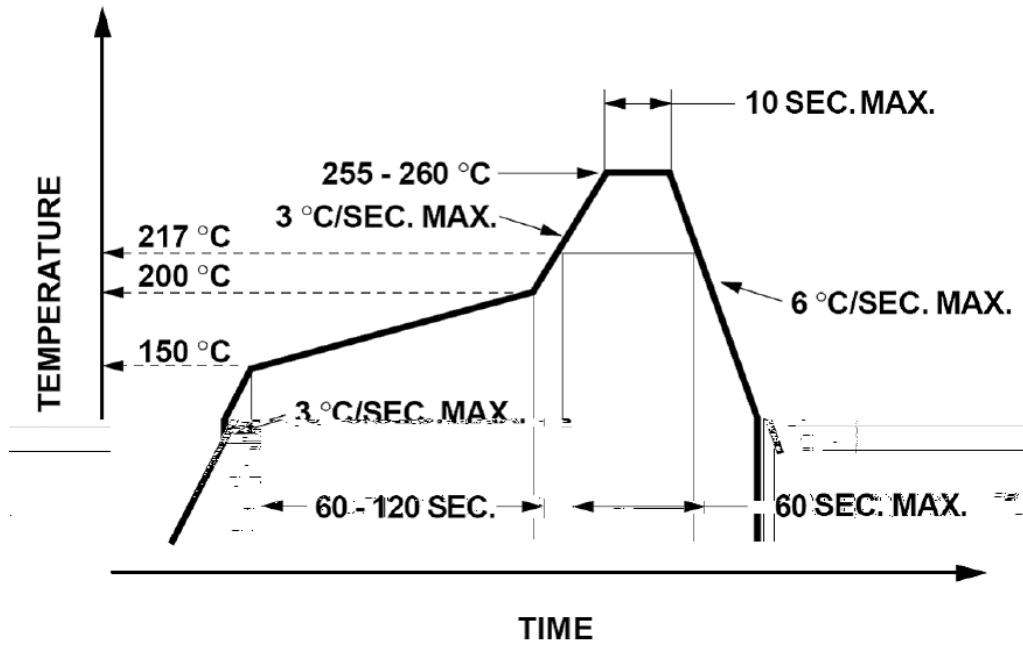

Soldering iron

°C

Repairing

