
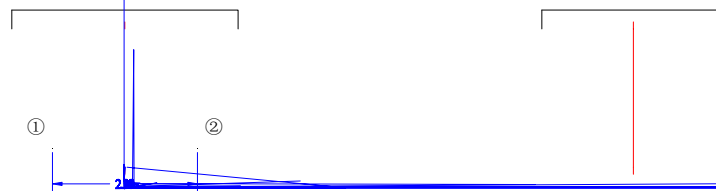


Features

Pb free product—RoHS compliant
High Photo Sensitivity
Reliable and rugged
Long life – solid state reliability
Sensitivity angle: 35°

Package Dimension



Part NO.	Chip Material	Lens Color
SL-T4232PTB020-L380	Silicon	Black

Notes:

1. All dimensions are in millimeters.
2. Tolerance is ± 0.10 mm unless otherwise noted.
3. Specifications are subject to change without notice.

Typical Electrical / Optical Characteristics Curves (25 Ambient Temperature Unless Otherwise Noted)

FIG.1 Relative Response vs. Wavelength

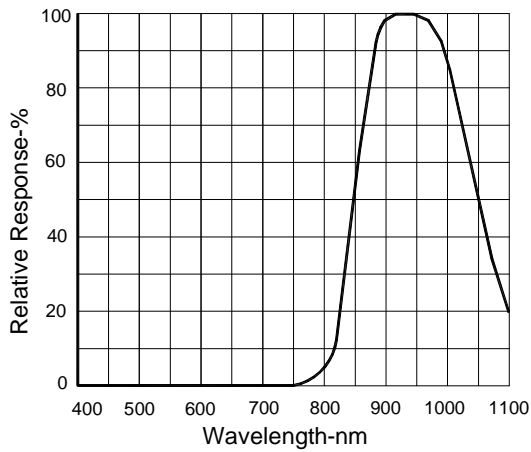


FIG.2 Power Dissipation Vs. Ambient Temperature

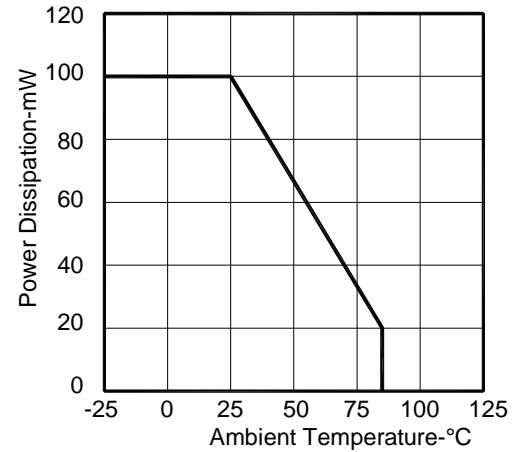


FIG.3 Rise And Fall Time Vs. Load Resistance

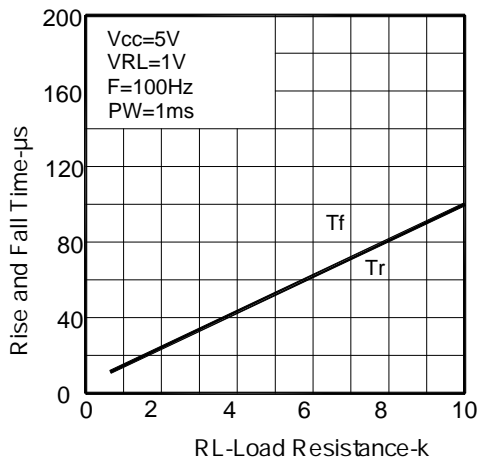


FIG.4 Relative Collector Current Vs. Irradiance

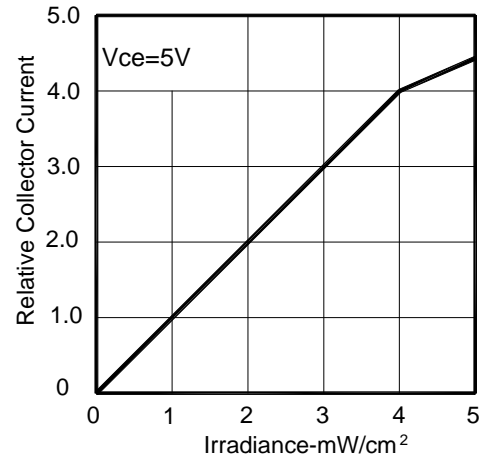


FIG.5 Collector Dark Current Vs. Ambient Temperature


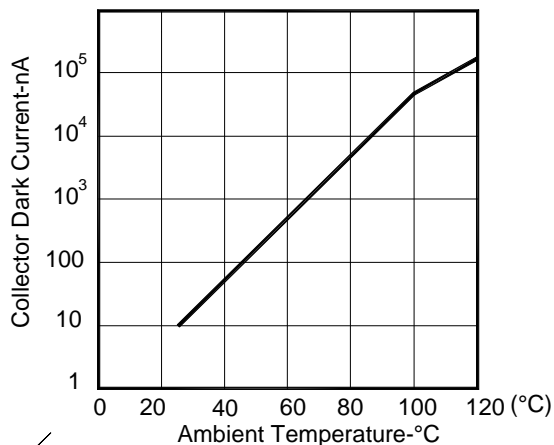


FIG.6 Light Current vs. Angular Displacement

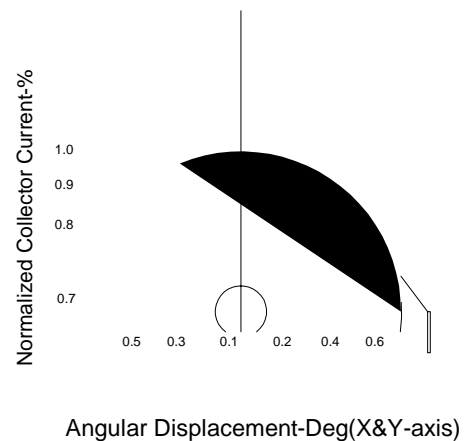

Ic(on) Bin Code ($V_{CE}=5V$, $E_e=1mW/cm^2$, $p=940$)

Label Explanation

LIGHT Universal Label

LIGHT	
Light Electronics CO., LTD.	
MODEL NAME: _____	LOT NO. : _____
QUANTITY: _____	
BIN _____	
PACKING DATE: _____	
REMARKS: _____	

Customer Defined Label

LIGHT	
Light Electronics CO., LTD.	
MODEL NAME: _____	
QUANTITY: _____	
BIN _____	
PACKING DATE: _____	
CUSTOMER R _____	

LIGHT

